

4. Seat Assembly

- Attach the Seat (#3) as shown.
- Insert the front screw hole with TA4x8x8 Screw (#19) and the back screw hole with TA4x12x8 Screw (#11), then tighten with screwdriver (not included).

Lil Flame Racer (FTF)

Assembly and Safety Instructions

**Model No.: 10055481/10055482
10055484**

CARE & MAINTENANCE

- Use a soft, dry or damp cloth to clean surface of the vehicle. Do not use soap and water, solvents or abrasive materials to wash the vehicle or spray it with a hose.
- Check all screws and their protective coverings regularly and tighten as required.
- Put the vehicle away when not in use and do not store in direct sunlight.


jollyroom .se

Made in China

Produced by: Jollyroom AB
Tagenevägen 58
425 37, Hisings Kärra, SWEDEN
Consumer contact: 046 (0) 31-310 00 00



Please read this manual carefully before assembly and use.
Product features may vary from the picture above.

 **WARNING:** Contains small parts, sharp points and sharp edges. Adult assembly required.

 **WARNING:** Choking Hazard-Contains small parts.

SPECIFICATION

For Ages:	2 and up
Vehicle Dimension:	30.2" x 10.63" x 13.58" / 76.7x27x34.5cm
Net Weight:	11.4 lbs / 5.2kgs
Maximum Weight Limit:	55 lbs / 25kgs

CAUTION


- RIDING HAZARD**
- Keep Children Within Safe Riding Areas. Keep away from swimming pools and other bodies of water to prevent drownings. Do not use on slope, roads, near highway, near cars, steps, steep inclines, and alleys.
 - Direct Adult Supervision Required.
 - Only one child should ride this vehicle at a time. The weight limit is 25 kgs. Do not overload.
 - Always sit on the seat.
 - Always wear shoes or suitable footwear.
 - Take care when driving the vehicle.
 - Destroy polybag after you have unpacked vehicle carton to avoid accidents and suffocation. Children must not play with the plastic bags.
 - The toy should be used with caution since skill is required to avoid falls or collisions causing injury to the user or third parties.

COMPONENT LIST




2


INSTALLATION INSTRUCTIONS

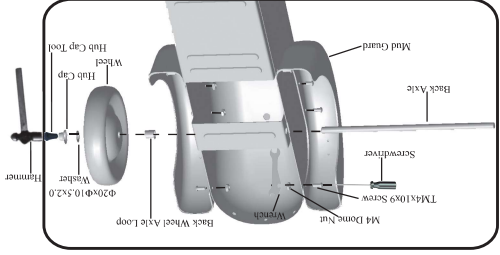

- Back Wheel Assembly**
 - Attach the mud guard (#5) to the body as shown.
 - Insert TM4x10x9 Screws (#12) and M4 Hex Nuts (#16), then tighten with Wrench (#23) and Screwdriver (not included).
 - Insert the Back Axle (#8) and attach the Back Wheel Axle Loop (#14), the Wheel (#2), $\Phi 20 \times \Phi 10.5 \times 2.0$ Washer (#10), and tighten the Hub Cap (#17) with the Hub Cap Tool (#21) and hammer (not included).
 - Repeat the same step for the other side.

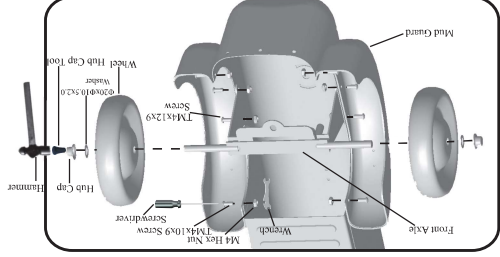

- Front Wheel Assembly**
 - Attach the Mud Guard (#5) to the body as shown.
 - Insert TM4x10x9 Screws (#12) & M4 Hex Nuts (#16) to the right & left screw holes of mud guard. Then tighten with Wrench (#23) and screwdriver.
 - Then attach, line up the Front Axle (#4) to the screw holes, and insert TM4x12x9 Screws (#20) in the middle and M4 Hex Nuts (#16), then tighten with Wrench (#23) and screwdriver.
 - Now attach the Wheel (#2), $\Phi 20 \times \Phi 10.5 \times 2.0$

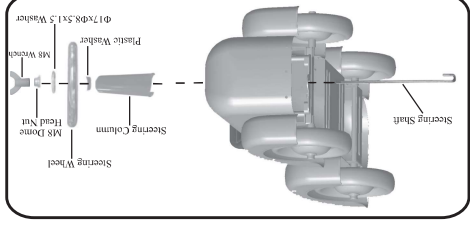

- Steering Wheel Assembly**
 - Insert the Steering Shaft (#6) as shown.
 - Then insert the Steering Column (#9), Plastic Washer (#7), Steering Wheel (#1), $\Phi 17 \times \Phi 8.5 \times 1.5$ Washer (#15) and M8 Domehead Nut (#18).
 - Tighten with M8 Wrench.

3